


Driver:	Airtemp:	Size:	<input type="checkbox"/> Open	<input type="checkbox"/> Med.	<input type="checkbox"/> Tight
Date: . .	Humidity:	Traction:	<input type="checkbox"/> High	<input type="checkbox"/> Med.	<input type="checkbox"/> Low
Track:	Track temp:	Surface:	<input type="checkbox"/> Smooth	<input type="checkbox"/> Med.	<input type="checkbox"/> Bumpy

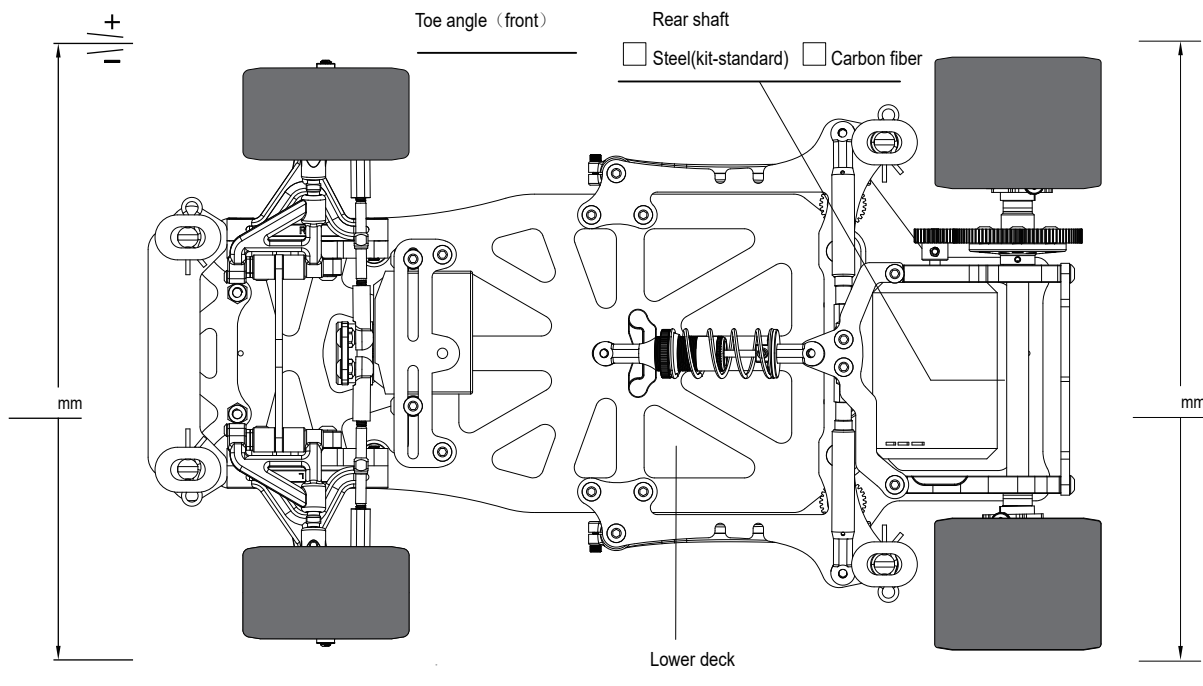

《Front》

<input type="checkbox"/> 0.5mm <input type="checkbox"/> 1.0mm <input type="checkbox"/> 2.0mm <input type="checkbox"/> 5.0mm	Wheel Base <input type="checkbox"/> Short <input type="checkbox"/> Mid <input type="checkbox"/> Long FR shim <input type="checkbox"/> 1.80° Thick <input type="checkbox"/> 3.25° Thin <input type="checkbox"/> 6.15° Thick, Thin RR Shim <input type="checkbox"/> Thin <input type="checkbox"/> Thick <input type="checkbox"/> Thick, Thin Front Shim <input type="checkbox"/> 10° <input type="checkbox"/> 5° <input type="checkbox"/> 0° <input type="checkbox"/>
--	---

Ground clearance mm

《Front spring》

☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)

☐ Hard
☐ Soft

《Damper》

Coil spring
☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)

Roll damper
 Oil # _____
 Piston hole(S) _____
 Oil # _____

《Rear》

Spacer mm
 Spacer mm
 Ground clearance mm
 Roll spring mm
 Ground clearance mm

《Rear ground clearance》

☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)

Hole Position
☐ Top
☐ Bottom

Motor	Spur gear	T	Pinion gear	T
Front wheel	Front tire		Front tire diameter	mm
Rear wheel	Rear tire		Rear tire diameter	mm
Body	Front wing		Rear wing	
Battery	Best lap			
Memo				